

Cube Wall Mount

Product Data Sheet

Our Standard Wall Mount Rack is designed perfectly for EIA-Standard 19 inch rack equipment Retail locations, classrooms, and other areas with limited floor space. This cabinet has a load capacity of 250lbs, made from heavy duty steel and a powder-coated finish.

4500

The front door comes in Solid, Perforated or Plexi-Glass.




Features


- Variety of Front Door Options
- Made from Heavy-Duty steel with a load capacity of 250lbs
- Swings away from wall to allow east back door access to equipment
- Vented walls for perfect fan placement
- Ships fully assembled for fast installation
- Rails available in either SQ Punch or Threaded 12-24


SPECIFICATIONS										
Description	Wall Mount Rack, 19" EIA rack mount, Lockable Front Door, Swing Mid Cube									
Use	Indoor Use Only									
		Usable Interior Space	Overall Size							
Available Sizes	• Height:	RU (12 / 18 / 25)	24" / 34.5" / 46.75" 24"							
(See Details)	• Width:	19" EIA rack mount								
	• Depth:	13" / 18" / 23"	19.25" / 24.25" / 29.25"							
Load Capacity	250lbs									
Material	18GA Steel Front Door, 14GA Steel RU Rails, 16GA Steel Mid Cube, 16GA Steel Back Panel									
Construction	Bolted Front Door, Riveted/Welded Mid Cube, Swinging Hinge Pin/Plate System, Riveted/Welded Back Panel									
Finish	Powder coat paint									



Details



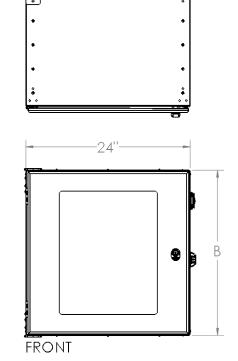



Dimension A: The amount of Rack Units (RU/U). Each RU is 1.75".

TOP

Dimension B: The overall Height of the cabinet top to bottom.

Dimension C: The Depth of the mid cube, which is also the amount of usable interior space.

Dimension D: The overall Depth of the cabinet front to back, includes front door.

Front Door

- Solid, Perforated, or Plexi-Glass Window
- Reversible (Leftward/Rightward Opening)
- Lockable (Same key as Back Panel)

Rails

- 19"EIA rack spacing, (18.315" Hole-to-Hole, 17.75" Front Clearance, 19" Back Clearance)
- Comes in either #12-24 Threaded OR 3/8" Square Punched

Mid Cube


- Perforated Sides allow air flow, increased with optional fan attachment.
- Hinge Plate/Pin Mounts Mid Cube to Back Panel, Allows rear access for servicing.

Back Panel

• Cable Knockouts/Panel.



Components and Accessories

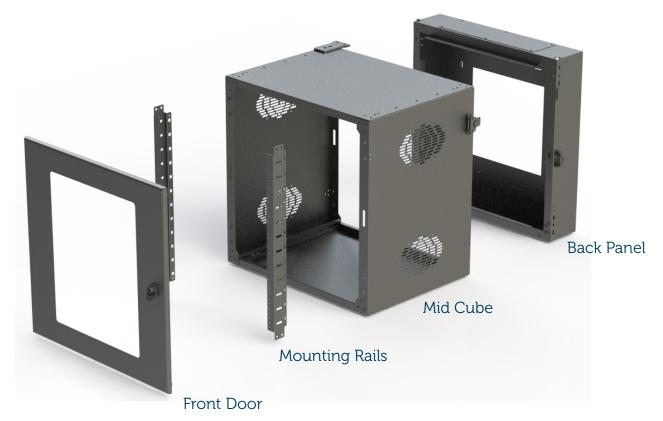

ORDERING INFORMATION												
4 5 0 0 -	Color		Rack Units (A)	Overall Height (B)	Usable Depth (C)	Overall Depth (D)	Front Door Style		Rail Style			
	WH	White	12	24"	13	19.25"	S	Solid	Т	12-24 Tapped		
	ВК	Black	18	34.5"	18	24.25"	Р	Perforated	S	3/8 Square		
	GR	Grey	25	46.75"	23	29.25"	G	Plexi-Glass				

Included

- (1) Front Door
- (1) Pair Mounting Rails
- (1) Mid Cube (Perforated Sides/Solid Top-Bottom)
- (1) 1 Back Panel
- (1) Rail Hardware Kit
 - (8) 1/4"-20 Carriage Bolt
 - (8) 1/4"-20 Carriage Nut
 - (50) #12-24 Rack Mounting Screws